



|                         |   |
|-------------------------|---|
| <b>Engine</b>           | Cummins X12, EU Stage V                           |
| <b>Net Power</b>        | 282 kW (378 hp) @ 2,100 rpm                       |
| <b>Operating Weight</b> | 47,000-49,800 kg<br>(103,617 lbs-109,790 lbs)     |
| <b>Bucket Capacity</b>  | 2.6-3.2 m <sup>3</sup> (3.4-4.2 yd <sup>3</sup> ) |

# 950E EXCAVATOR

# TOUGH WORLD. TOUGH EQUIPMENT.

You don't need to be told it's a tough world. It's your reality, you live it every day and you know how hard it can be on your people and your machines. It's getting tougher to make your business pay too, with rising costs, increasing legislation and greater competition. We understand and we've put that understanding into action with our new 950E.

## 950E. NO TOUGH COMPROMISES, JUST EVERYTHING YOU NEED AND NOTHING YOU DON'T

The construction equipment industry has seen an expensive trend towards over-engineered products. Some manufacturers genuinely believe that adding cost, adds perceived value in customers' eyes.

## BUT YOU TOLD US A DIFFERENT STORY

You asked for a tough, well-engineered excavator, which can do the job. Any job.

### YOU WANTED A LARGE-SIZED EXCAVATOR THAT DELIVERS ON 3 ESSENTIAL NEEDS;



**HEAVYWEIGHT CREDIBILITY**

**UPTIME AND SUPPORT**

**TOTAL COST OF OWNERSHIP**



With the 950E, we've met your challenge and given you everything you want – without compromise.



## TOUGH FACTS

### AWARD WINNING DESIGN

Our UK-based design team has invested thousands of man hours to really understand how our machines are used every day. This insight shapes our innovative approach to product design. Our design team recently won a prestigious Red Dot Award for our D-Series Grader and all our products this award-winning design DNA.

### TOUGH RESEARCH AND TESTING

Finding tougher, smarter, safer and more cost-effective ways of working matters to you. It matters to us too. Our new Global Research & Development Centre is a great example of this customer focused approach. We've established an international team of industry experts, backed up with the latest world-class technology, all focused on delivering greater value to you.

### TOUGH QUALITY STANDARDS

When it comes to quality, we let our actions to speak for themselves.

We follow a rigorous Six Sigma methodology and consistently achieve ISO 9001 standards.

**TOUGH TALK?** Judge for yourself.



# HEAVYWEIGHT CREDIBILITY

Firstly, you need to know that your machine is up to the job; breaking, digging, lifting, working hard – anytime – anywhere. Excavators have got to be tough and they've got to perform.

## OUR NEW 950E HIGH PERFORMANCE FROM THE GROUND UP

### 1 TOUGHER UNDERCARRIAGE

With X-shaped frame built from high strength tensile steel, the 950E's undercarriage is designed to withstand the toughest conditions. Continuous digging, lifting and loading can put excessive stress on machines. The 950E has a long track beam and crawler system that guarantees greater stability. The structure also helps protect key components such as the travel motor from undue stress.

### 2 TOUGHER COMPONENTS

The undercarriage components are tougher too. Heavy duty rollers, reinforced idler frame and optional full track guard guarantee the integrity of our undercarriage. It's this core strength that enables our customers to keep working and earning – around the clock.

### 3 TOUGHER UPPER STRUCTURE

The upper structure of the 950E is built around a reinforced and well-engineered H-beam, allowing the boom to be mounted exactly in the center of the machine. This central positioning helps the boom cope with more stress on the attachment group. It also means better distribution of weight and tension along the entire machine.

### 4 SAFER CAB

Our cabs are designed to protect your most important asset. Your operator. ROPS (Roll Over Protection System) and FOPS (Falling Object Protection System) safeguard your most important asset: your operator in the toughest environment. Visibility is key to protecting your operator and workers on site. The large glass surface area, spacious cab, combined with the rear-view camera, provides an extraordinary view of the 950E's surroundings.

### 5 TOUGHER BOOM AND ARM

The 950E features a tougher, reinforced heavy duty boom and arm built from high-strength tensile steel, with castings and forgings in high stress areas for heavy-duty performance and maximum uptime. We also use over-sized pins to allow the 950E, not just to work harder, but to work harder for longer. Our confidence in our machines is underlined by one of the most comprehensive warranties in the industry.



## 6 SIMPLY MULTIFUNCTIONAL

Switching attachments like buckets, breakers and shears can be time consuming and hazardous. We've made it fast, safe and simple with LiuGong's quick coupler and powerlatch tilt coupler. These are perfectly matched to a range of genuine LiuGong attachments including; buckets and breakers which can be changed from the seat of the cab in less than a minute, quick, safe and easy.

## 7 SIMPLER TO DO THE JOB RIGHT

Six selectable work modes equip even the newest operator with the skills of an expert, allowing them to perfectly match machine performance with the job, whatever that job may be.



Power



Economy



Fine



Lifting



Breaker



Attachment

## 8 FAST CYCLE TIMES

High hydraulic flow and swing speeds combine to ensure fast cycle times on tasks such as truck loading, digging, trenching and backfilling.



## JOBSITE FACT: ANYTIME



10000 hours registered and still working hard.

Tapegyseg Co. Hungary

"We use our LiuGong excavator for breaking down large stone and concrete sections. In two years we have not had a problem and our machines are working 10-11 hours a day, six days a week."

## JOBSITE FACT: ANYWHERE!



-49°C

Temperatures drop but the work rate stays high.

LiuGong Excavators played a key part in supporting China's Polar Exploration team. Extreme temperatures, high altitudes, strong winds and intense ultraviolet light made the Antarctic an extremely tough test environment.

## TOUGH JUDGES

Operators are tough judges. They know what they like and what they don't. We've talked, we've listened and we've delivered a no-nonsense excavator that will do everything the operator wants and needs it to do. Job done? Judge for yourself.

**TOUGH EQUIPMENT**  
**100,000** Excavators currently in the field.  
 Over **1 BILLION** productive hours worked.

# POWER TO GET THE TOUGHEST JOBS DONE RIGHT


Heavyweight credibility is about giving your operators efficient and intelligent power when they need it, with control and precision. That's what we do.

## POWER WITHOUT COMPROMISE.

The 950E is powered by the latest Cummins X12 engine with a rated net power of 282 kW (378 hp) @ 2,100 rpm in compliance with EU Stage V emission standards.

The compact X12 delivers unmatched and dependable power in its class yet it produces virtually zero emissions.

The engine utilizes a precise and high pressure common-rail fuel injection system, turbo charger (VGT) and air-to-air intercooler along with electronic engine controls to optimize machine performance. It's powerful. It's responsive. It tackles the toughest jobs without being thirsty for fuel, but above all, it's a joy to operate.

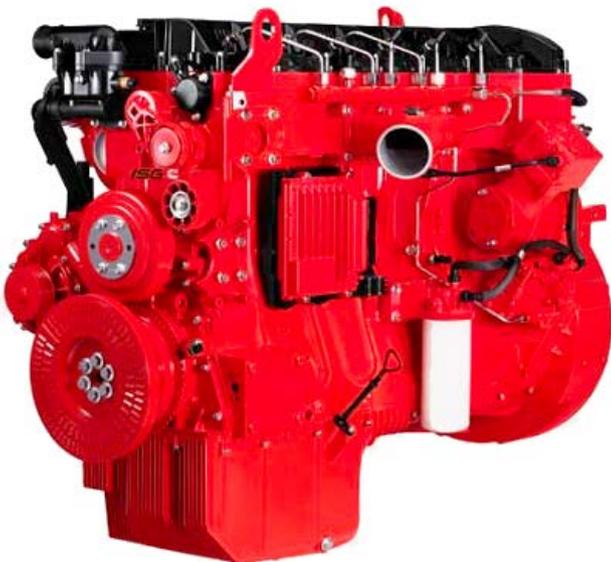

## INTELLIGENT POWER CONTROL

The 950E's advanced Intelligent Power Control (IPC) system intelligently delivers the power you need – when you need it.

This new generation computer-aided IPC system allows the 950E's mechanical, electrical and hydraulic systems to work together in perfect harmony and helps even novice operators get more from the machine. An improved pump system delivers efficient oil output under lower engine speeds, resulting in fuel efficiency and reduced noise levels.

## ADVANCED HYDRAULIC SYSTEM

LiuGong's advanced hydraulic system, regenerates oil in the cylinders more efficiently reducing heat, increasing fuel efficiency and improving cycle times.

The hydraulic system is highly effective in delivering power and precise control to where the operator really needs it, making even the toughest job simple.



The 950E is powered by the latest Cummins X12 engine with a rated net power of 282 kW (378 hp) @ 2,100 rpm in compliance with EU Stage V emission standards.

The compact X12 delivers unmatched and dependable power in its class yet it produces virtually zero emissions.

The engine utilizes a precise and high pressure common-rail fuel injection system, turbo charger (VGT) and air-to-air intercooler along with electronic engine controls to optimize machine performance. It's powerful. It's responsive. It tackles the toughest jobs without being thirsty for fuel, but above all, it's a joy to operate.



# DAILY CHECKS AND MAINTENANCE SHOULDN'T BE TOUGH

LiuGong excavators have been **specifically designed** for easy service and maintenance in even the most remote and harsh environments. If servicing is easy, it gets done.

## PRACTICAL SERVICING

Smart and effective design makes service and maintenance fast and simple – that's good news for operators who work in some of the toughest places on the planet.

Handrails are fitted as standard, enabling safe and easy access to the upper structure for easy engine service and maintenance.

## ON BOARD MONITORING

With onboard monitoring, the operator can check the machine's vital signs without leaving his seat. Using the LCD display, the operator can easily check oil temperatures and pressure levels, receive service interval alerts and access other information that contributes to simple maintenance and servicing of the machine.



## EASILY ACCESSIBLE SERVICE POINTS MAKE DAILY CHECKS FAST AND EFFECTIVE

- Easily visible hydraulic oil level gauge
- Accessible, grouped filters
- Easy to replace A/C filter next to the cab door
- Maintenance free air filter

# DESIGNED TO MAKE TOUGH WORK EASY ON THE OPERATOR

Climb into the cab of the 950E and you can see that it has been designed by someone who has operated a machine in really tough conditions.

For a start, it's safe and easy to get in and out of.

Trips and slips account for the majority of accidents onsite. Well-placed door handles, safety rails and anti-slip tape on the upper part of the machine make it easier and safer for operators to enter and exit the cab in all weathers and conditions.

Inside, the cab is secure and protected with space to work and excellent 360 degree views of the site.

The controls are where the operator needs them to be. They are easy to see, easy to reach and easy to handle.

The multi-adjustable air-suspension seats are comfortable and designed to keep the operator fresh and alert.

The cab is sound proofed, vibration protected and well ventilated. It has advanced climate control to handle the changing seasons and is completely sealed to prevent dust contamination.



## WE PUT OPERATORS FIRST

It makes good business sense to give operators the very best working environment – a comfortable operator is a productive operator. The 950E keeps operators safer, more alert and more productive.

Smart additions such as; rear view camera, heated seats, refrigerator or personal belonging compartment and an iPod/AUX connection combine to create the best environment– for the best operators.



## **ADVANCED CLIMATE CONTROL**

An advanced climate control system creates the right environment in any weather.

## **LARGE LCD MONITOR**

The easy-to-read, full-color LCD monitor displays all the critical information your operator needs, including working mode, hydraulic oil temperature, hydraulic pressure and service intervals.





# JOBSITE UPTIME AND SUPPORT

Heavyweight credibility might convince you to buy your first machine, but it's uptime and support and total cost of ownership which will keep you coming back to buy more machines. Having confidence in the machine's back up and support network is a vital part of the purchasing decision. How do we at LiuGong measure up?


## FAST RESPONDING GLOBAL NETWORK

We have an extensive dealer network of over 300 dealers in more than 100 countries.

All supported by 13 regional subsidiaries and 17 regional parts depots offering expert training, parts and service support.



## WE ARE LIUGONG. WORKING HARD TO KEEP OUR GLOBAL CUSTOMERS EARNING

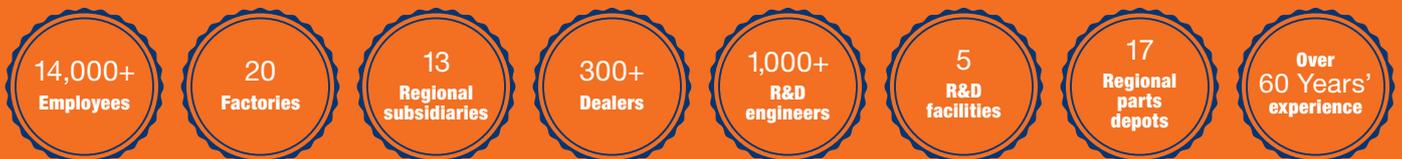

## WHERE YOU NEED US WHEN YOU NEED US

Reliability is built into our machines but all machines have some planned downtime. Our aim is to reduce even planned down time to the minimum by getting it right. Technician training and parts availability are also high on our agenda, as is keeping you

informed on service and maintenance work and providing clear and accurate estimates, invoices and communication.

These may be small things, but customer feedback tells us that these basics really matter – so we aim to get them right.

## MAINTENANCE AND SUPPORT PACKAGES

From genuine LiuGong parts, to full repair and maintenance contracts, LiuGong has the flexibility to offer the level of support and response to suit your business and applications. Whatever level of support you choose you can be confident that it is backed up by LiuGong's service promise.



**Right parts.  
Right price.  
Right service.**

**Above all,  
we get it right  
the first time.**

**1°**



## LIUGONG SERVICE PROMISE



Highly trained technicians utilizing the latest diagnostic equipment



15,000+ Genuine LiuGong parts available within 24hrs from our European Parts Distribution Center



Multi-lingual Service helpline and online support



Transparent estimates and invoicing



Clear communications through electronic parts catalogue



# TOTAL COST OF OWNERSHIP

Heavyweight credibility and uptime & support are two key excavator purchasing criteria but ultimately, the machines earning potential, its overall life cost and its trade-in value really matter too.

When it comes to total cost of ownership LiuGong has a strong story to tell.

## PROFESSIONAL ADVICE

We are committed to reducing your total cost of ownership and increasing your profits. As part of this, LiuGong's experts will provide targeted advice on everything, from choosing the right machine for your needs to maximizing its efficiency on site.

## MACHINE AVAILABILITY

Our machines deliver everything you need and nothing you don't. They are expertly engineered NOT over engineered. As a result of having an extensive manufacturing operation right in the heart of Europe, we can offer significantly shorter lead times on

a range of models, compared with some manufacturers. In fact, we can deliver selected machines in as little as 4 weeks.

The faster you can get a machine – the faster you can get working and earning.

Our aim is to get you on to the jobsite fast.

## TICKET PRICE

At LiuGong, our aim is to provide you with real, measurable value by giving you everything you need and nothing you don't. We choose high quality, proven components and parts from world-renowned brands and suppliers.

These proven components, combined with LiuGong design and manufacturing quality, result in a high quality, competitive machine that is totally fit for purpose.

## RESIDUAL VALUE

With the combination of LiuGong design and manufacturing excellence, world class components and comprehensive uptime support, our quality holds its value.





## IT ALL ADDS UP

With the 950E we've risen to the challenge and given you everything you need and nothing you don't.

It's an excavator which can handle any job, anywhere, backed up by LiuGong's service promise and designed to perform on the jobsite and on the balance sheet. Add up the benefits and you'll see that 950E represents the formula for success.



**HEAVYWEIGHT  
CREDIBILITY**

+

**UPTIME AND  
SUPPORT**

+

**TOTAL COST  
OF OWNERSHIP**

---

**CUSTOMER SATISFACTION**

---

# SPECIFICATIONS

**Operating weight** 47,000-49,800 kg  
(103,617-109,790 lbs)

Operating weight includes coolant, lubricants, full fuel tank, cab, standard shoes, boom, arm, bucket and operator 75 kg.

**Bucket capacity** 2.6-3.2 m<sup>3</sup> (3.4-4.2 yd<sup>3</sup>)

## ENGINE

### Description

Cummins EU Stage V, 6-cylinder straight Variable-Geometry Turbocharger (VGT), high pressure common rail, electronically controlled direct injection. Air cleaner: Cummins direct flow air filter. Cooling system: Air-to-air intercooler.

Emission rating EU Stage V

Engine manufacturer Cummins

Engine model X12

Aspiration VGT

Charged air cooling Aftercooler

Cooling fan drive Hydraulic

Displacement 11.8 L (3.12 gal)

Rated speed 2,100 rpm

Engine output - net  
(SAE J1349 / ISO 9249) 282 kW (378 hp)

Engine output - gross  
(SAE J1995 / ISO 14396) 298 kW (400 hp)

Maximum torque 2,034 N·m (1,500 lbf·ft) @1,400 rpm

Bore × Stroke 132 × 144 mm  
(5.2" × 5.7")

## UNDERCARRIAGE

Track shoe each side 51

Link pitch 216 mm (8.5")

Shoe width, triple grouser 700/800/900 mm  
(28"/32"/35")

Bottom rollers each side 9

Top rollers each side 2

## SWING SYSTEM

### Description

Planetary gear reduction driven by high torque axial piston motor, with oil disk brake. Swing parking brake resets within five seconds after swing pilot controls return to neutral.

Swing speed 8.5 rpm

Swing torque 165,300 N·m (121,919 lbf·ft)

## HYDRAULIC SYSTEM

### Main pump

Type Two variable displacement piston pumps

Maximum flow 2 × 380 L/min  
(2 × 100.4 gal/min)

### Pilot pump

Type Gear pump

Maximum flow 28.5 L/min  
(7.5 gal/min)

### Relief valve setting

Implement 32.3/35 MPa  
(4,685 / 5,076 psi)

Travel circuit 32.3 MPa (4,685 psi)

Slew circuit 28 MPa (4,061 psi)

Pilot circuit 3.9 MPa (566 psi)

### Hydraulic cylinders

Boom Cylinder – Bore × Stroke Φ165 × 1,560 mm  
(Φ6.5" × 5'1")

Arm Cylinder – Bore × Stroke Φ190 × 1,980 mm  
(Φ7.5" × 6'6")

Bucket Cylinder – Bore × Stroke Φ170 × 1,260 mm  
(Φ6.7" × 4'2")

## ELECTRIC SYSTEM

System Voltage 24 V

Batteries 2 × 12 V

Alternator 24 V - 70 A

Start motor 24 V - 7.5 kW  
(24 V - 10.1 hp)

## SERVICE CAPACITIES

Fuel tank 650 L (171.7 gal)

Engine oil 34 L (9.0 gal)

Final drive (each) 15 L (4.0 gal)

Swing drive 2 × 5.3 L (2 × 1.4 gal)

Cooling system 33 L (8.7 gal)

Hydraulic reservoir 290 L (76.6 gal)

Hydraulic system total 520 L (137.4 gal)

DEF tank 56.8 L (15 gal)

## SOUND PERFORMANCE

Interior Sound Power Level (ISO 6396) 72 dB(A)

Exterior Sound Power Level (ISO 6395) 106 dB(A)

## DRIVE AND BRAKES


### Description

2-speed axial piston motors with oil disk brakes. Steering controlled by two hand levers with pedals.

Max. travel speed High: 5.3 km/h (3.3 mph)  
Low: 3.3 km/h (2.1 mph)

Gradeability 35°/70%

Max. drawbar pull 386 kN (86,776 lbf)

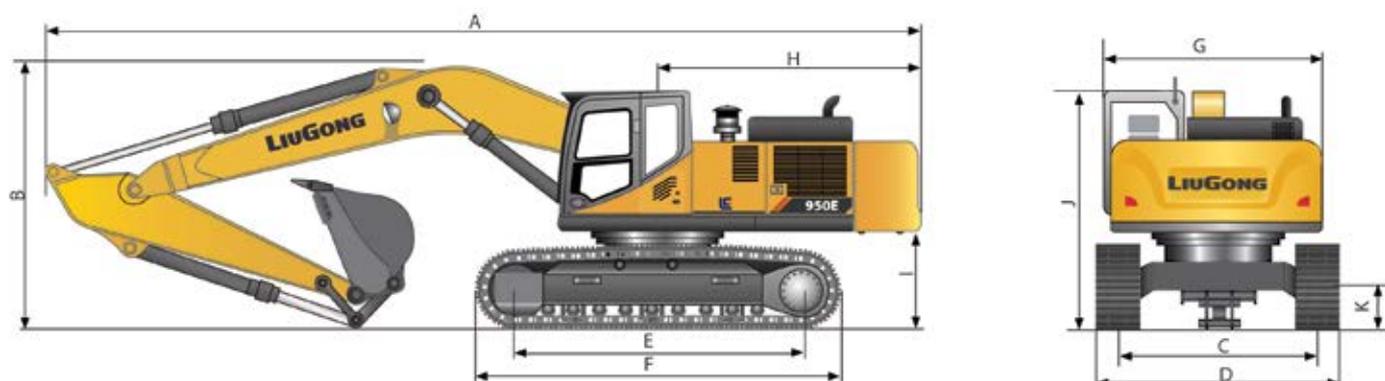

## DIMENSIONS

|                                      |                   |                   |                   |
|--------------------------------------|-------------------|-------------------|-------------------|
| Boom                                 | 6,500 mm (21'4")  | 7,060 mm (23'2")  |                   |
| Arm Options                          | 2,550 mm (8'4")   | 2,900 mm (9'6")   | 3,380 mm (11'1")  |
| A Shipping Length                    | 11,515 mm (37'9") | 12,030 mm (39'6") | 12,062 mm (39'7") |
| B Shipping Height – Top of Boom      | 3,810 mm (12'6")  | 3,810 mm (12'6")  | 3,690 mm (12'1")  |
| C Track Gauge                        | 2,740 mm (9')     | 2,740 mm (9')     |                   |
| D Undercarriage Width – 600 mm shoes | 3,340 mm (10'11") | 3,340 mm (10'11") |                   |
| 700 mm shoes                         | 3,440 mm (11'3")  | 3,440 mm (11'3")  |                   |
| 800 mm shoes                         | 3,540 mm (11'7")  | 3,540 mm (11'7")  |                   |
| 900 mm shoes                         | 3,640 mm (11'11") | 3,640 mm (11'11") |                   |
| E Length to Center of Rollers        | 4,257 mm (14')    | 4,257 mm (14')    |                   |
| F Track Length                       | 5,256 mm (17'3")  | 5,256 mm (17'3")  |                   |
| G Overall Width of Upper Structure   | 3,180 mm (10'5")  | 3,180 mm (10'5")  |                   |
| H Tail Swing Radius                  | 3,640 mm (11'11") | 3,640 mm (11'11") |                   |
| I Counterweight Ground Clearance     | 1,324 mm (4'4")   | 1,324 mm (4'4")   |                   |
| J Overall Height of Cab              | 3,550 mm (11'8")  | 3,550 mm (11'8")  |                   |
| K Min. Ground Clearance              | 532 mm (1'9")     | 532 mm (1'9")     |                   |
| L Track Shoe Width                   | 900 mm (35")      | 900 mm (35")      |                   |

## MACHINE WEIGHTS AND GROUND PRESSURE

|              | Operating weight   | Ground pressure     | Overall width      |
|--------------|--|---------------------|--------------------|
| Shoe width   | 7.06 m (23'2 ") boom/2.9 m (9'6") arm/2.6 m <sup>3</sup> (3.40 yd <sup>3</sup> ) bucket/ 9,000 kg (19,842 lbs) counterweight<br>7.06 m (23'2 ") boom/3.38 m (11'1") arm/2.2 m <sup>3</sup> (2.88 yd <sup>3</sup> ) bucket/ 9,000 kg (19,842 lbs) counterweight |                     |                    |
| 700 mm (28") | 48,600 kg (107,145 lbs)  | 73.7 kPa (10.7 psi) | 3,440 mm (11' 3")  |
| 800 mm (32") | 49,200 kg (108,467 lbs)  | 65.3 kPa (9.5 psi)  | 3,540 mm (11' 7")  |
| 900 mm (35") | 49,800 kg (109,790 lbs)  | 58.7 kPa (8.5 psi)  | 3,640 mm (11' 11") |

## ARM DIMENSIONS


|        | Standard             | Options              |                      |
|--------|----------------------|----------------------|----------------------|
| Arm    | 2,550 mm (8'4")      | 2,900 mm (9'6")      | 3,380 mm (11'1")     |
| Length | 3,885 mm (12'9")     | 4,245 mm (13'11")    | 4,750 mm (15'7")     |
| Height | 1,150 mm (3'9")      | 1,150 mm (3'9")      | 1,150 mm (3'9")      |
| Width  | 602 mm (2')          | 602 mm (2')          | 602 mm (2')          |
| Weight | 2,390 kg (5,269 lbs) | 2,310 kg (5,093 lbs) | 2,500 kg (5,512 lbs) |

Cylinder, linkage and pin included.

## BOOM DIMENSIONS

|        | Standard             | Options              |
|--------|----------------------|----------------------|
| Boom   | 6,500 mm (21'4")     | 7,060 mm (23'2")     |
| Length | 6,800 mm (22'4")     | 7,350 mm (24'1")     |
| Height | 1,910 mm (6'3")      | 1,850 mm (6'1")      |
| Width  | 1,057 mm (3'6")      | 1,057 mm (3'6")      |
| Weight | 4,150 kg (9,149 lbs) | 4,350 kg (9,590 lbs) |

Cylinder, piping and pin included. Boom cylinder pin excluded.

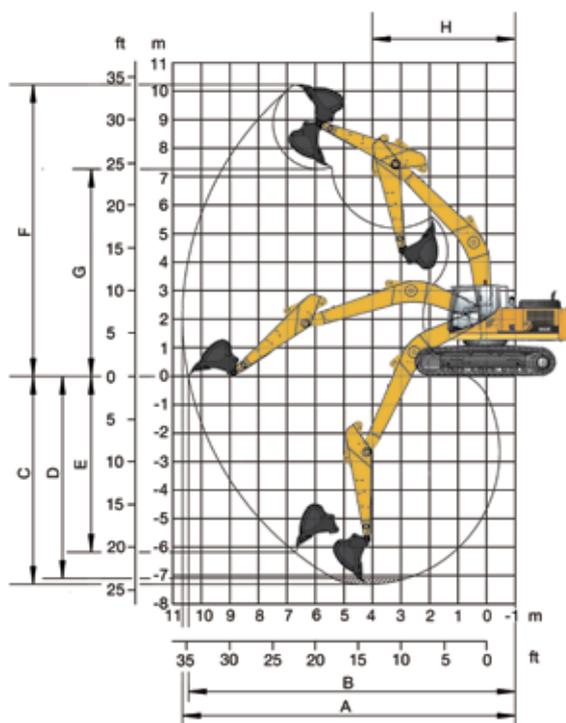

#### WORKING RANGE

|  |             |   |   |  |
|--|-------------|---|---|--|
| Boom Length                              |             | 6,500 mm (21'4")                          | 7,060 mm (23'2")                          |  |
| Arm Length                               |             | 2,550 mm (8'4")                           | 2,900 mm (9'6")                           | 3,380 mm (11'1")                           |
| A. Max. Digging Reach                    |             | 10,625 mm (34'10")                        | 11,585 mm (38')                           | 12,020 mm (39'5")                          |
| B. Max. Digging Reach on Ground          |             | 10,388 mm (34'1")                         | 11,368 mm (37'4")                         | 11,810 mm (38'9")                          |
| C. Max. Digging Depth                    |             | 6,521 mm (21'5")                          | 7,380 mm (24'3")                          | 7,860 mm (25'9")                           |
| D. Max. Digging Depth, 2.44 m (8') level |             | 6,337 mm (20'9")                          | 7,218 mm (23'8")                          | 7,715 mm (25'4")                           |
| E. Max. Vertical Wall Digging Depth      |             | 5,204 mm (17'1")                          | 6,011 mm (19'9")                          | 6,435 mm (21'1")                           |
| F. Max. Cutting Height                   |             | 9,977 mm (32'9")                          | 10,618 mm (34'10")                        | 10,785 mm (35'5")                          |
| G. Max. Dumping Height                   |             | 7,038 mm (23'1")                          | 7,578 mm (24'10")                         | 7,520 mm (24'8")                           |
| H. Min. front swing radius               |             | 4,645 mm (15'3")                          | 5,052 mm (16'7")                          | 5,015 mm (16'5")                           |
| Bucket Digging Force (ISO)               | Normal      | 265 kN (59,574 lbf)                       | 263 kN (59,125 lbf)                       | 268 kN (60,249 lbf)                        |
|  | Power Boost | 280 kN (62,947 lbf)                       | 287 kN (64,520 lbf)                       | 288 kN (64,745 lbf)                        |
| Arm Digging Force (ISO)                  | Normal      | 255 kN (57,326 lbf)                       | 240 kN (53,954 lbf)                       | 209 kN (46,985 lbf)                        |
|  | Power Boost | 270 kN (60,698 lbf)                       | 263 kN (59,125 lbf)                       | 225 kN (50,582 lbf)                        |
| Bucket Capacity                          |             | 3.2 m <sup>3</sup> (4.2 yd <sup>3</sup> ) | 2.6 m <sup>3</sup> (3.4 yd <sup>3</sup> ) | 2.2 m <sup>3</sup> (2.88 yd <sup>3</sup> ) |
| Bucket Tip Radius                        |             | 1,845 mm (6'1")                           | 1,837 mm (6')                             | 1,837 mm (6')                              |

Lifting capacity at the arm end without bucket.  
For lifting capacity including bucket, weight of the bucket or the bucket with quick coupler must be deducted from the lifting capacities.

Lifting capacities are based on the machine standing on a firm, uniform supporting surface.



Rating over-front (Cf)



Rating over-side (Cs)


- Do not attempt to lift or hold any load that is greater than these rated values at their specified load radius and height. Weight of all accessories must be deducted from the above lifting capacities.
- The rated loads are in compliance with ISO 10567 Hydraulic Excavator Lift Capacity Rating Standard. They do not exceed 87% of hydraulic lifting capacity or 75% tipping load.
- Ratings at bucket lift hook.
- Lifting capacities are based on machine standing on level, firm and uniform ground.
- \*Indicates the load is limited by hydraulic capacity rather than tipping capacity.
- Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine and rules for the safe operation of equipment should be adhered to at all times.

**950E with 700 mm Shoes, 6,500 mm Boom, 2,550 mm Arm**

- A: Load radius
- B: Load point height
- C: Lifting capacity rating
- Cf: Rating loads over front
- Cs: Rating loads over side

**Conditions**

Boom length: 6,500 mm  
Arm length: 2,550 mm  
Bucket: None  
Counterweight: 9,000 kg  
Shoes: 700 mm triple grouser  
Unit: kg




| B (m)        | A (Unit: m) |         |         |         |         |         |         |        |           |         | A (m)  |     |
|--------------|-------------|---------|---------|---------|---------|---------|---------|--------|-----------|---------|--------|-----|
|              | 3           |         | 4.5     |         | 6       |         | 7.5     |        | MAX REACH |         |        |     |
|              | Cf          | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf        | Cs      |        |     |
| 7.5          |             |         |         |         |         |         |         |        |           | *12,940 | 11,800 | 7.1 |
| 6            |             |         |         |         | *14,660 | *14,660 | *13,110 | 10,780 | *12,820   | 9,730   |        | 8.0 |
| 4.5          |             |         | *20,860 | *20,860 | *16,060 | 14,440  | *13,630 | 10,520 | *12,650   | 8,760   |        | 8.5 |
| 3            |             |         |         |         | *17,550 | 13,720  | *14,310 | 10,180 | 12,320    | 8,180   |        | 8.8 |
| 1.5          |             |         |         |         | *18,460 | 13,190  | *14,760 | 9,890  | 12,180    | 8,060   |        | 8.8 |
| GROUND LEVEL |             |         | *23,890 | 19,320  | *18,410 | 12,940  | *14,650 | 9,730  | *12,650   | 8,350   |        | 8.5 |
| - 1.5        |             |         | *21,770 | 19,480  | *17,280 | 12,940  | *13,620 | 9,750  | *12,390   | 9,040   |        | 8.0 |
| - 3          | *20,940     | *20,940 | *18,300 | *18,300 | *14,690 | 13,170  |         |        | *11,770   | 10,680  |        | 7.1 |
| - 4.5        |             |         | *12,390 | *12,390 |         |         |         |        | *9,640    | *9,640  |        | 5.7 |

**950E with 28" Shoes, 21'4" Boom, 8'4" Arm**

- A: Load radius
- B: Load point height
- C: Lifting capacity rating
- Cf: Rated loads over front
- Cs: Rated loads over side

**Conditions**

Boom length: 21'4"  
Arm length: 8'4"  
Bucket: None  
Counterweight: 19,824 lbs  
Shoes: 28" triple grouser  
Unit: lbs



| B (ft)       | A (Unit: ft) |         |         |         |         |         |         |        |           |         | A (ft)  |      |
|--------------|--------------|---------|---------|---------|---------|---------|---------|--------|-----------|---------|---------|------|
|              | 10           |         | 15      |         | 20      |         | 25      |        | MAX REACH |         |         |      |
|              | Cf           | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf        | Cs      |         |      |
| 25           |              |         |         |         |         |         |         |        |           | *28,520 | *25,550 | 23.3 |
| 20           |              |         |         |         | *32,310 | *32,310 | *28,900 | 23,760 | *28,260   | 21,050  |         | 26.2 |
| 15           |              |         | *45,980 | *45,980 | *35,400 | 31,830  | *30,040 | 23,190 | *27,880   | 18,930  |         | 27.9 |
| 10           |              |         |         |         | *38,690 | 30,240  | *31,540 | 22,440 | 27,160    | 17,680  |         | 28.9 |
| 5            |              |         |         |         | *40,690 | 29,070  | *32,540 | 21,800 | 26,850    | 17,390  |         | 28.9 |
| GROUND LEVEL |              |         | *52,660 | 42,590  | *40,580 | 28,520  | *32,290 | 21,450 | *27,880   | 18,030  |         | 27.9 |
| - 5          |              |         | *47,990 | 42,940  | *38,090 | 28,520  | *30,020 | 21,490 | *27,310   | 19,510  |         | 26.2 |
| - 10         | *46,160      | *46,160 | *40,340 | *40,340 | *32,380 | 29,030  |         |        | *25,940   | 23,080  |         | 23.3 |
| - 15         |              |         | *27,310 | *27,310 |         |         |         |        | *21,250   | *21,250 |         | 18.7 |


## LIFTING CAPACITY (METRIC)

### 950E with 800 mm Shoes, 6,500 mm Boom, 2,550 mm Arm

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rating loads over front  
 Cs: Rating loads over side

### Conditions

Boom length: 6,500 mm  
 Arm length: 2,550 mm  
 Bucket: None  
 Counterweight: 9,000 kg  
 Shoes: 800 mm triple grouser  
 Unit: kg




| B (m)        | A (Unit: m) |         |         |         |         |         |         |        |           |         | A (m)  |     |
|--------------|-------------|---------|---------|---------|---------|---------|---------|--------|-----------|---------|--------|-----|
|              | 3           |         | 4.5     |         | 6       |         | 7.5     |        | MAX REACH |         |        |     |
|              | Cf          | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf        | Cs      |        |     |
| 7.5          |             |         |         |         |         |         |         |        |           | *12,940 | 12,010 | 7.1 |
| 6            |             |         |         |         | *14,660 | *14,660 | *13,110 | 10,980 | *12,820   | 9,920   |        | 8.0 |
| 4.5          |             |         | *20,860 | *20,860 | *16,060 | 14,700  | *13,630 | 10,720 | *12,650   | 8,930   |        | 8.5 |
| 3            |             |         |         |         | *17,550 | 13,990  | *14,310 | 10,380 | *12,550   | 8,350   |        | 8.8 |
| 1.5          |             |         |         |         | *18,460 | 13,460  | *14,760 | 10,090 | *12,410   | 8,220   |        | 8.8 |
| GROUND LEVEL |             |         | *23,890 | 19,720  | *18,410 | 13,210  | *14,650 | 9,930  | *12,650   | 8,520   |        | 8.5 |
| - 1.5        |             |         | *21,770 | 19,870  | *17,280 | 13,200  | *13,620 | 9,940  | *12,390   | 9,220   |        | 8.0 |
| - 3          | *20,940     | *20,940 | *18,300 | *18,300 | *14,690 | 13,440  |         |        | *11,770   | 10,890  |        | 7.1 |
| - 4.5        |             |         | *12,390 | *12,390 |         |         |         |        | *9,640    | *9,640  |        | 5.7 |

### 950E with 900 mm Shoes, 6,500 mm Boom, 2,550 mm Arm

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rating loads over front  
 Cs: Rating loads over side

### Conditions

Boom length: 6,500 mm  
 Arm length: 2,550 mm  
 Bucket: None  
 Counterweight: 9,000 kg  
 Shoes: 900 mm triple grouser  
 Unit: kg



| B (m)        | A (Unit: m) |         |         |         |         |         |         |        |           |         | A (m)  |     |
|--------------|-------------|---------|---------|---------|---------|---------|---------|--------|-----------|---------|--------|-----|
|              | 3           |         | 4.5     |         | 6       |         | 7.5     |        | MAX REACH |         |        |     |
|              | Cf          | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf        | Cs      |        |     |
| 7.5          |             |         |         |         |         |         |         |        |           | *12,940 | 12,220 | 7.1 |
| 6            |             |         |         |         | *14,660 | *14,660 | *13,110 | 11,180 | *12,820   | 10,100  |        | 8.0 |
| 4.5          |             |         | *20,860 | *20,860 | *16,060 | 14,970  | *13,630 | 10,920 | *12,650   | 9,100   |        | 8.5 |
| 3            |             |         |         |         | *17,550 | 14,260  | *14,310 | 10,580 | *12,560   | 8,510   |        | 8.8 |
| 1.5          |             |         |         |         | *18,460 | 13,720  | *14,760 | 10,290 | *12,570   | 8,390   |        | 8.8 |
| GROUND LEVEL |             |         | *23,890 | 20,110  | *18,410 | 13,470  | *14,650 | 10,130 | *12,650   | 8,690   |        | 8.5 |
| - 1.5        |             |         | *21,770 | 20,270  | *17,280 | 13,470  | *13,620 | 10,140 | *12,390   | 9,400   |        | 8.0 |
| - 3          | *20,940     | *20,940 | *18,300 | *18,300 | *14,690 | 13,700  |         |        | *11,770   | 11,100  |        | 7.1 |
| - 4.5        |             |         | *12,390 | *12,390 |         |         |         |        | *9,640    | *9,640  |        | 5.7 |


**LIFTING CAPACITY (IMPERIAL)**

**950E with 32" Shoes, 21'4" Boom, 8'4" Arm**

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rating loads over front  
 Cs: Rating loads over side

**Conditions**

Boom length: 21'4"  
 Arm length: 8'4"  
 Bucket: None  
 Counterweight: 19,824 lbs  
 Shoes: 32" triple grouser  
 Unit: lbs



**A (Unit: ft)**


| B (ft)       | 10      |         | 15      |         | 20      |         | 25      |        | MAX REACH |         | A (ft) |
|--------------|---------|---------|---------|---------|---------|---------|---------|--------|-----------|---------|--------|
|              | Cf      | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf        | Cs      |        |
| 25           |         |         |         |         |         |         |         |        | *28,520   | 26,470  | 23.3   |
| 20           |         |         |         |         | *32,310 | *32,310 | *28,900 | 24,200 | *28,260   | 21,860  | 26.2   |
| 15           |         |         | *45,980 | *45,980 | *35,400 | 32,400  | *30,040 | 23,630 | *27,880   | 19,680  | 27.9   |
| 10           |         |         |         |         | *38,690 | 30,840  | *31,540 | 22,880 | *27,660   | 18,400  | 28.9   |
| 5            |         |         |         |         | *40,690 | 29,670  | *32,540 | 22,240 | *27,350   | 18,120  | 28.9   |
| GROUND LEVEL |         |         | *52,660 | 43,470  | *40,580 | 29,120  | *32,290 | 21,890 | *27,880   | 18,780  | 27.9   |
| - 5          |         |         | *47,990 | 43,800  | *38,090 | 29,100  | *30,020 | 21,910 | *27,310   | 20,320  | 26.2   |
| - 10         | *46,160 | *46,160 | *40,340 | *40,340 | *32,380 | 29,630  |         |        | *25,940   | 24,000  | 23.3   |
| - 15         |         |         | *27,310 | *27,310 |         |         |         |        | *21,250   | *21,250 | 18.7   |

**950E with 35" Shoes, 21'4" Boom, 8'4" Arm**

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rated loads over front  
 Cs: Rated loads over side

**Conditions**

Boom length: 21'4"  
 Arm length: 8'4"  
 Bucket: None  
 Counterweight: 19,824 lbs  
 Shoes: 35" triple grouser  
 Unit: lbs



**A (Unit: ft)**

| B (ft)       | 10      |         | 15      |         | 20      |         | 25      |        | MAX REACH |         | A (ft) |
|--------------|---------|---------|---------|---------|---------|---------|---------|--------|-----------|---------|--------|
|              | Cf      | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf        | Cs      |        |
| 25           |         |         |         |         |         |         |         |        | *28,520   | 26,940  | 23.3   |
| 20           |         |         |         |         | *32,310 | *32,310 | *28,900 | 24,640 | *28,260   | 22,260  | 26.2   |
| 15           |         |         | *45,980 | *45,980 | *35,400 | 33,000  | *30,040 | 24,070 | *27,880   | 20,060  | 27.9   |
| 10           |         |         |         |         | *38,690 | 31,430  | *31,540 | 23,320 | *27,690   | 18,760  | 28.9   |
| 5            |         |         |         |         | *40,690 | 30,240  | *32,540 | 22,680 | *27,710   | 18,490  | 28.9   |
| GROUND LEVEL |         |         | *52,660 | 44,330  | *40,580 | 29,690  | *32,290 | 22,330 | *27,880   | 19,150  | 27.9   |
| - 5          |         |         | *47,990 | 44,680  | *38,090 | 29,690  | *30,020 | 22,350 | *27,310   | 20,720  | 26.2   |
| - 10         | *46,160 | *46,160 | *40,340 | *40,340 | *32,380 | 30,200  |         |        | *25,940   | 24,470  | 23.3   |
| - 15         |         |         | *27,310 | *27,310 |         |         |         |        | *21,250   | *21,250 | 18.7   |

LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.




### 950E with 700 mm Shoes, 7,060 mm Boom, 2,900 mm Arm

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rating loads over front  
 Cs: Rating loads over side

### Conditions

Boom length: 7,060 mm  
 Arm length: 2,900 mm  
 Bucket: None  
 Counterweight: 9,000 kg  
 Shoes: 700 mm triple grouser  
 Unit: kg




| B (m)        | A (Unit: m) |         |         |         |         |         |         |        |         |       |           |         | A (m) |
|--------------|-------------|---------|---------|---------|---------|---------|---------|--------|---------|-------|-----------|---------|-------|
|              | 3           |         | 4.5     |         | 6       |         | 7.5     |        | 9       |       | MAX REACH |         |       |
|              | Cf          | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf      | Cs    | Cf        | Cs      |       |
| 7.5          |             |         |         |         |         |         | *11,690 | 11,020 |         |       | *11,520   | 9,740   | 8.2   |
| 6            |             |         |         |         |         |         | *12,100 | 10,830 |         |       | *11,250   | 8,340   | 9.0   |
| 4.5          |             |         | *20,610 | *20,610 | *15,450 | 14,360  | *12,900 | 10,500 | *11,430 | 8,080 | *11,170   | 7,570   | 9.5   |
| 3            |             |         |         |         | *17,140 | 13,630  | *13,770 | 10,120 | *11,810 | 7,900 | 10,670    | 7,110   | 9.7   |
| 1.5          |             |         |         |         | *18,200 | 13,100  | *14,420 | 9,810  | 11,720  | 7,740 | 10,560    | 7,010   | 9.7   |
| GROUND LEVEL |             |         | *19,180 | *19,180 | *18,350 | 12,850  | *14,580 | 9,610  | 11,610  | 7,640 | 10,810    | 7,150   | 9.5   |
| - 1.5        |             |         | *22,130 | 19,400  | *17,580 | 12,810  | *15,810 | 9,560  | *11,170 | 7,650 | *11,170   | 7,650   | 9.0   |
| - 3          | *22,610     | *22,610 | *19,500 | *19,500 | *15,810 | 12,940  | *12,550 | 9,670  |         |       | *10,940   | 8,700   | 8.2   |
| - 4.5        | *17,410     | *17,410 | *15,370 | *15,370 | *12,480 | *12,480 |         |        |         |       | *10,080   | *10,080 | 7.0   |

### 950E with 28" Shoes, 23'2" Boom, 11'1" Arm

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rated loads over front  
 Cs: Rated loads over side

### Conditions

Boom length: 23'2"  
 Arm length: 11'1"  
 Bucket: None  
 Counterweight: 19,824 lbs  
 Shoes: 28" triple grouser  
 Unit: lbs



| B (ft)       | A (Unit: ft) |         |         |         |         |        |         |        |         |        |           |         | A (ft) |      |
|--------------|--------------|---------|---------|---------|---------|--------|---------|--------|---------|--------|-----------|---------|--------|------|
|              | 10           |         | 15      |         | 20      |        | 25      |        | 30      |        | MAX REACH |         |        |      |
|              | Cf           | Cs      | Cf      | Cs      | Cf      | Cs     | Cf      | Cs     | Cf      | Cs     | Cf        | Cs      |        |      |
| 25           |              |         |         |         |         |        |         |        |         |        |           | *19,420 | 19,290 | 28.5 |
| 20           |              |         |         |         |         |        | *25,280 | 24,030 | *23,390 | 18,160 | *20,670   | 16,930  | 30.8   |      |
| 15           |              |         | *42,100 | *42,100 | *32,270 | 31,960 | *27,180 | 23,210 | *24,160 | 17,810 | *20,430   | 15,410  | 32.5   |      |
| 10           |              |         | *50,260 | 44,840  | *36,240 | 30,200 | *29,290 | 22,310 | *25,190 | 17,350 | 22,110    | 14,700  | 33.1   |      |
| 5            |              |         | *48,010 | 41,400  | *39,080 | 28,830 | *30,970 | 21,510 | 25,700  | 16,900 | 21,860    | 14,480  | 33.1   |      |
| GROUND LEVEL |              |         | *47,900 | 42,020  | *40,080 | 28,060 | *31,720 | 20,980 | 25,370  | 16,600 | 22,310    | 14,720  | 32.5   |      |
| - 5          | *35,270      | *35,270 | *50,440 | 42,080  | *39,060 | 27,840 | *31,150 | 20,760 | *25,220 | 16,510 | *23,250   | 15,490  | 31.2   |      |
| - 10         | *55,490      | *55,490 | *45,320 | 42,590  | *35,950 | 28,020 | *28,660 | 20,870 |         |        | *23,230   | 17,430  | 28.5   |      |
| - 15         | *45,040      | *45,040 | *37,280 | *37,280 | *29,960 | 28,630 | *22,590 | 21,490 |         |        | *21,980   | 21,160  | 24.9   |      |


**LIFTING CAPACITY (IMPERIAL)**

**950E with 32" Shoes, 23'2" Boom, 9'6" Arm**

**Conditions**

- A: Load radius
- B: Load point height
- C: Lifting capacity rating
- Cf: Rating loads over front
- Cs: Rating loads over side

Boom length: 23'2"  
 Arm length: 9'6"  
 Bucket: None  
 Counterweight: 19,824 lbs  
 Shoes: 32" triple grouser  
 Unit: lbs



**A (Unit: ft)**


| B (ft)       | 10      |         | 15      |         | 20      |         | 25      |        | 30      |        | MAX REACH |         | A (ft) |
|--------------|---------|---------|---------|---------|---------|---------|---------|--------|---------|--------|-----------|---------|--------|
|              | Cf      | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf      | Cs     | Cf        | Cs      |        |
| 25           |         |         |         |         |         |         | *25,770 | 24,730 |         |        | *25,390   | 21,860  | 26.9   |
| 20           |         |         |         |         |         |         | *26,670 | 24,310 |         |        | *24,800   | 18,730  | 29.5   |
| 15           |         |         | *34,850 | *34,850 | *34,850 | 32,250  | *28,430 | 23,560 | *25,190 | 18,160 | *24,620   | 17,010  | 31.2   |
| 10           |         |         |         |         | *37,780 | 30,640  | *30,350 | 22,750 | *26,030 | 17,760 | 23,960    | 16,000  | 31.8   |
| 5            |         |         |         |         | *40,120 | 29,470  | *31,790 | 22,060 | 26,320  | 17,410 | 23,720    | 15,780  | 31.8   |
| GROUND LEVEL |         |         | *42,280 | *42,280 | *40,450 | 28,900  | *32,140 | 21,620 | 26,080  | 17,190 | 24,270    | 16,090  | 31.2   |
| - 5          |         |         | *48,780 | *43,650 | *38,750 | 28,810  | *34,850 | 21,510 | *24,620 | 17,240 | *24,620   | 17,240  | 29.5   |
| - 10         | *49,840 | *49,840 | *42,990 | *42,990 | *34,850 | 29,120  | *27,660 | 21,750 |         |        | *24,110   | 19,570  | 26.9   |
| - 15         | *38,380 | *38,380 | *33,880 | *33,880 | *27,510 | *27,510 |         |        |         |        | *22,220   | *22,220 | 23.0   |

**950E with 35" Shoes, 23'2" Boom, 9'6" Arm**

**Conditions**

- A: Load radius
- B: Load point height
- C: Lifting capacity rating
- Cf: Rated loads over front
- Cs: Rated loads over side

Boom length: 23'2"  
 Arm length: 9'6"  
 Bucket: None  
 Counterweight: 19,824 lbs  
 Shoes: 35" triple grouser  
 Unit: lbs



**A (Unit: ft)**

| B (ft)       | 10      |         | 15      |         | 20      |         | 25      |        | 30      |        | MAX REACH |         | A (ft) |
|--------------|---------|---------|---------|---------|---------|---------|---------|--------|---------|--------|-----------|---------|--------|
|              | Cf      | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf      | Cs     | Cf        | Cs      |        |
| 25           |         |         |         |         |         |         | *25,770 | 25,170 |         |        | *25,390   | 22,260  | 26.9   |
| 20           |         |         |         |         |         |         | *26,670 | 24,750 |         |        | *24,800   | 19,110  | 29.5   |
| 15           |         |         | *45,430 | *45,430 | *34,060 | 32,840  | *28,430 | 24,000 | *25,190 | 18,510 | *24,620   | 17,350  | 31.2   |
| 10           |         |         |         |         | *37,780 | 31,210  | *30,350 | 23,190 | *26,030 | 18,120 | 24,400    | 16,330  | 31.8   |
| 5            |         |         |         |         | *40,120 | 30,040  | *31,790 | 22,500 | *26,600 | 17,760 | 24,160    | 16,090  | 31.8   |
| GROUND LEVEL |         |         | *42,280 | *42,280 | *40,450 | 29,490  | *32,140 | 22,060 | *26,410 | 17,540 | *24,620   | 16,420  | 31.2   |
| - 5          |         |         | *48,780 | 44,530  | *38,750 | 29,400  | *34,850 | 21,950 | *24,620 | 17,570 | *24,620   | 17,570  | 29.5   |
| - 10         | *49,840 | *49,840 | *42,990 | *42,990 | *34,850 | 29,690  | *27,660 | 22,200 |         |        | *24,110   | 19,970  | 26.9   |
| - 15         | *38,380 | *38,380 | *33,880 | *33,880 | *27,510 | *27,510 |         |        |         |        | *22,220   | *22,220 | 23.0   |

LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.


### LIFTING CAPACITY (METRIC)

#### 950E with 800 mm Shoes, 7,060 mm Boom, 2,900 mm Arm

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rating loads over front  
 Cs: Rating loads over side

#### Conditions

Boom length: 7,060 mm  
 Arm length: 2,900 mm  
 Bucket: None  
 Counterweight: 9,000 kg  
 Shoes: 800 mm triple grouser  
 Unit: kg




| B (m)        | A (Unit: m) |         |         |         |         |         |         |        |         |       |         |         | MAX REACH<br>A (m) |
|--------------|-------------|---------|---------|---------|---------|---------|---------|--------|---------|-------|---------|---------|--------------------|
|              | 3           |         | 4.5     |         | 6       |         | 7.5     |        | 9       |       |         |         |                    |
|              | Cf          | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf      | Cs    | Cf      | Cs      |                    |
| 7.5          |             |         |         |         |         |         | *11,690 | 11,220 |         |       | *11,520 | 9,920   | 8.2                |
| 6            |             |         |         |         |         |         | *12,100 | 11,030 |         |       | *11,250 | 8,500   | 9.0                |
| 4.5          |             |         | *20,610 | *20,610 | *15,450 | 14,630  | *12,900 | 10,690 | *11,430 | 8,240 | *11,170 | 7,720   | 9.5                |
| 3            |             |         |         |         | *17,140 | 13,900  | *13,770 | 10,320 | *11,810 | 8,060 | 10,870  | 7,260   | 9.7                |
| 1.5          |             |         |         |         | *18,200 | 13,370  | *14,420 | 10,010 | 11,940  | 7,900 | 10,760  | 7,160   | 9.7                |
| GROUND LEVEL |             |         | *19,180 | *19,180 | *18,350 | 13,110  | *14,580 | 9,810  | 11,830  | 7,800 | 11,010  | 7,300   | 9.5                |
| - 1.5        |             |         | *22,130 | *19,800 | *17,580 | 13,070  | *15,810 | 9,760  | *11,170 | 7,820 | *11,170 | 7,820   | 9.0                |
| - 3          | *22,610     | *22,610 | *19,500 | *19,500 | *15,810 | 13,210  | *12,550 | 9,870  |         |       | *10,940 | 8,880   | 8.2                |
| - 4.5        | *17,410     | *17,410 | *15,370 | *15,370 | *12,480 | *12,480 |         |        |         |       | *10,080 | *10,080 | 7.0                |

#### 950E with 900 mm Shoes, 7,060 mm Boom, 2,900 mm Arm

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rating loads over front  
 Cs: Rating loads over side

#### Conditions

Boom length: 7,060 mm  
 Arm length: 2,900 mm  
 Bucket: None  
 Counterweight: 9,000 kg  
 Shoes: 900 mm triple grouser  
 Unit: kg




| B (m)        | A (Unit: m) |         |         |         |         |         |         |        |         |       |         |         | MAX REACH<br>A (m) |
|--------------|-------------|---------|---------|---------|---------|---------|---------|--------|---------|-------|---------|---------|--------------------|
|              | 3           |         | 4.5     |         | 6       |         | 7.5     |        | 9       |       |         |         |                    |
|              | Cf          | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf      | Cs    | Cf      | Cs      |                    |
| 7.5          |             |         |         |         |         |         | *11,690 | 11,420 |         |       | *11,520 | 10,100  | 8.2                |
| 6            |             |         |         |         |         |         | *12,100 | 11,230 |         |       | *11,250 | 8,670   | 9.0                |
| 4.5          |             |         | *20,610 | *20,610 | *15,450 | 14,900  | *12,900 | 10,890 | *11,430 | 8,400 | *11,170 | 7,870   | 9.5                |
| 3            |             |         |         |         | *17,140 | 14,160  | *13,770 | 10,520 | *11,810 | 8,220 | 11,070  | 7,410   | 9.7                |
| 1.5          |             |         |         |         | *18,200 | 13,630  | *14,420 | 10,210 | *12,070 | 8,060 | 10,960  | 7,300   | 9.7                |
| GROUND LEVEL |             |         | *19,180 | *19,180 | *18,350 | 13,380  | *14,580 | 10,010 | *11,980 | 7,960 | *11,170 | 7,450   | 9.5                |
| - 1.5        |             |         | *22,130 | 20,200  | *17,580 | 13,340  | *15,810 | 9,960  | *11,170 | 7,970 | *11,170 | 7,970   | 9.0                |
| - 3          | *22,610     | *22,610 | *19,500 | *19,500 | *15,810 | 13,470  | *12,550 | 10,070 |         |       | *10,940 | 9,060   | 8.2                |
| - 4.5        | *17,410     | *17,410 | *15,370 | *15,370 | *12,480 | *12,480 |         |        |         |       | *10,080 | *10,080 | 7.0                |

**950E with 700 mm Shoes, 7,060 mm Boom, 3,380 mm Arm**

**Conditions**

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rating loads over front  
 Cs: Rating loads over side

Boom length: 7,060 mm  
 Arm length: 3,380 mm  
 Bucket: None  
 Counterweight: 9,000 kg  
 Shoes: 700 mm triple grouser  
 Unit: kg



**A (Unit: m)**


| B (m)        | 3       |         | 4.5     |         | 6       |        | 7.5     |        | 9       |       | MAX REACH |       | A (m) |
|--------------|---------|---------|---------|---------|---------|--------|---------|--------|---------|-------|-----------|-------|-------|
|              | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf      | Cs     | Cf      | Cs    | Cf        | Cs    |       |
| 7.5          |         |         |         |         |         |        |         |        |         |       | *8,810    | 8,750 | 8.7   |
| 6            |         |         |         |         |         |        | *11,470 | 10,900 | *10,610 | 8,240 | *9,380    | 7,680 | 9.4   |
| 4.5          |         |         | *19,100 | *19,100 | *14,640 | 14,500 | *12,330 | 10,530 | *10,960 | 8,080 | *9,270    | 6,990 | 9.9   |
| 3            |         |         | *22,800 | 20,340  | *16,440 | 13,700 | *13,290 | 10,120 | *11,430 | 7,870 | 10,030    | 6,670 | 10.1  |
| 1.5          |         |         | *21,780 | 18,780  | *17,730 | 13,080 | *14,050 | 9,760  | 11,660  | 7,670 | 9,920     | 6,570 | 10.1  |
| GROUND LEVEL |         |         | *21,730 | 19,060  | *18,180 | 12,730 | *14,390 | 9,520  | 11,510  | 7,530 | 10,120    | 6,680 | 9.9   |
| - 1.5        | *16,000 | *16,000 | *22,880 | 19,090  | *17,720 | 12,630 | *14,130 | 9,420  | *11,440 | 7,490 | *10,550   | 7,030 | 9.5   |
| - 3          | *25,170 | *25,170 | *20,560 | 19,320  | *16,310 | 12,710 | *13,000 | 9,470  |         |       | *10,540   | 7,910 | 8.7   |
| - 4.5        | *20,430 | *20,430 | *16,910 | *16,910 | *13,590 | 12,990 | *10,250 | 9,750  |         |       | *9,970    | 9,600 | 7.6   |

**950E with 28" Shoes, 23'2" Boom, 9'6" Arm**

**Conditions**

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rated loads over front  
 Cs: Rated loads over side

Boom length: 23'2"  
 Arm length: 9'6"  
 Bucket: None  
 Counterweight: 19,824 lbs  
 Shoes: 28" triple grouser  
 Unit: lbs



**A (Unit: ft)**

| B (ft)       | 10      |         | 15      |         | 20      |         | 25      |        | 30      |        | MAX REACH |         | A (ft) |
|--------------|---------|---------|---------|---------|---------|---------|---------|--------|---------|--------|-----------|---------|--------|
|              | Cf      | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf      | Cs     | Cf        | Cs      |        |
| 25           |         |         |         |         |         |         | *25,770 | 24,290 |         |        | *25,390   | 20,280  | 26.9   |
| 20           |         |         |         |         |         |         | *26,670 | 23,870 |         |        | *24,800   | 17,320  | 29.5   |
| 15           |         |         | *45,430 | *45,430 | *34,060 | 31,650  | *28,430 | 23,140 | *25,190 | 17,810 | *24,620   | 15,690  | 31.2   |
| 10           |         |         |         |         | *37,780 | 30,040  | *30,350 | 22,310 | *26,030 | 17,410 | 23,520    | 14,720  | 31.8   |
| 5            |         |         |         |         | *40,120 | 28,880  | *31,790 | 21,620 | 25,830  | 17,060 | 23,280    | 14,500  | 31.8   |
| GROUND LEVEL |         |         | *42,280 | *42,280 | *40,450 | 28,320  | *32,140 | 21,180 | 25,590  | 16,840 | 23,830    | 14,770  | 31.2   |
| - 5          |         |         | *48,780 | 42,760  | *38,750 | 28,240  | *34,850 | 21,070 | *24,620 | 16,860 | *24,620   | 15,820  | 29.5   |
| - 10         | *49,840 | *49,840 | *42,990 | *42,990 | *34,850 | 28,520  | *27,660 | 21,310 |         |        | *24,110   | 18,010  | 26.9   |
| - 15         | *38,380 | *38,380 | *33,880 | *33,880 | *27,510 | *27,510 |         |        |         |        | *22,220   | *22,220 | 23.0   |


## LIFTING CAPACITY (METRIC)

### 950E with 800 mm Shoes, 7,060 mm Boom, 3,380 mm Arm

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rating loads over front  
 Cs: Rating loads over side

### Conditions

Boom length: 7,060 mm  
 Arm length: 3,380 mm  
 Bucket: None  
 Counterweight: 9,000 kg  
 Shoes: 800 mm triple grouser  
 Unit: kg




| B (m)        | A (Unit: m) |         |         |         |         |         |         |        |         |       |         |        | MAX REACH<br>A (m) |      |
|--------------|-------------|---------|---------|---------|---------|---------|---------|--------|---------|-------|---------|--------|--------------------|------|
|              | 3           |         | 4.5     |         | 6       |         | 7.5     |        | 9       |       |         |        |                    |      |
|              | Cf          | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf      | Cs    | Cf      | Cs     |                    |      |
| 7.5          |             |         |         |         |         |         |         |        |         |       |         | *8,810 | *8,810             | 8.7  |
| 6            |             |         |         |         |         |         | *11,470 | 11,100 | *10,610 | 8,400 | *9,380  | 7,830  |                    | 9.4  |
| 4.5          |             |         | *19,100 | *19,100 | *14,640 | *14,640 | *12,330 | 10,730 | *10,960 | 8,240 | *9,270  | 7,130  |                    | 9.9  |
| 3            |             |         | *22,800 | 20,740  | *16,440 | 13,970  | *13,290 | 10,320 | *11,430 | 8,030 | *10,110 | 6,810  |                    | 10.1 |
| 1.5          |             |         | *21,780 | 18,780  | *17,730 | 13,350  | *14,050 | 9,960  | *11,800 | 7,830 | 10,110  | 6,710  |                    | 10.1 |
| GROUND LEVEL |             |         | *21,730 | 19,450  | *18,180 | 13,000  | *14,390 | 9,710  | 11,730  | 7,690 | 10,310  | 6,820  |                    | 9.9  |
| - 1.5        | *16,000     | *16,000 | *22,880 | 19,490  | *17,720 | 12,890  | *14,130 | 9,610  | *11,440 | 7,650 | *10,550 | 7,180  |                    | 9.5  |
| - 3          | *25,170     | *25,170 | *20,560 | 19,720  | *16,310 | 12,970  | *13,000 | 9,670  |         |       | *10,540 | 8,080  |                    | 8.7  |
| - 4.5        | *20,430     | *20,430 | *16,910 | *16,910 | *13,590 | 13,250  | *10,250 | 9,950  |         |       | *9,970  | 9,790  |                    | 7.6  |

### 950E with 900 mm Shoes, 7,060 mm Boom, 3,380 mm Arm

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rating loads over front  
 Cs: Rating loads over side

### Conditions

Boom length: 7,060 mm  
 Arm length: 3,380 mm  
 Bucket: None  
 Counterweight: 9,000 kg  
 Shoes: 900 mm triple grouser  
 Unit: kg



| B (m)        | A (Unit: m) |         |         |         |         |         |         |        |         |       |         |        | MAX REACH<br>A (m) |      |
|--------------|-------------|---------|---------|---------|---------|---------|---------|--------|---------|-------|---------|--------|--------------------|------|
|              | 3           |         | 4.5     |         | 6       |         | 7.5     |        | 9       |       |         |        |                    |      |
|              | Cf          | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf      | Cs    | Cf      | Cs     |                    |      |
| 7.5          |             |         |         |         |         |         |         |        |         |       |         | *8,810 | *8,810             | 8.7  |
| 6            |             |         |         |         |         |         | *11,470 | 11,300 | *10,610 | 8,560 | *9,380  | 7,980  |                    | 9.4  |
| 4.5          |             |         | *19,100 | *19,100 | *14,640 | *14,640 | *12,330 | 10,930 | *10,960 | 8,400 | *9,270  | 7,270  |                    | 9.9  |
| 3            |             |         | *22,800 | 21,130  | *16,440 | 14,230  | *13,290 | 10,520 | *11,430 | 8,190 | *10,110 | 6,950  |                    | 10.1 |
| 1.5          |             |         | *21,780 | 18,780  | *17,730 | 13,610  | *14,050 | 10,160 | *11,800 | 7,990 | 10,300  | 6,850  |                    | 10.1 |
| GROUND LEVEL |             |         | *21,730 | 19,850  | *18,180 | 13,260  | *14,390 | 9,910  | *11,890 | 7,850 | 10,510  | 6,960  |                    | 9.9  |
| - 1.5        | *16,000     | *16,000 | *22,880 | 19,890  | *17,720 | 13,160  | *14,130 | 9,810  | *11,440 | 7,810 | *10,550 | 7,330  |                    | 9.5  |
| - 3          | *25,170     | *25,170 | *20,560 | 20,110  | *16,310 | 13,240  | *13,000 | 9,870  |         |       | *10,540 | 8,250  |                    | 8.7  |
| - 4.5        | *20,430     | *20,430 | *16,910 | *16,910 | *13,590 | 13,520  | *10,250 | 10,140 |         |       | *9,970  | *9,970 |                    | 7.6  |


**LIFTING CAPACITY (IMPERIAL)**

**950E with 32" Shoes, 23'2" Boom, 11'1" Arm**

**Conditions**

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rating loads over front  
 Cs: Rating loads over side

Boom length: 23'2"  
 Arm length: 11'1"  
 Bucket: None  
 Counterweight: 19,824 lbs  
 Shoes: 32" triple grouser  
 Unit: lbs



**A (Unit: ft)**


| B (ft)       | 10      |         | 15      |         | 20      |         | 25      |        | 30      |        | MAX REACH |         | A (ft)  |      |
|--------------|---------|---------|---------|---------|---------|---------|---------|--------|---------|--------|-----------|---------|---------|------|
|              | Cf      | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf      | Cs     | Cf        | Cs      |         |      |
| 25           |         |         |         |         |         |         |         |        |         |        |           | *19,420 | *19,420 | 28.5 |
| 20           |         |         |         |         |         |         | *25,280 | 24,470 | *23,390 | 18,510 | *20,670   | 17,260  | 30.8    |      |
| 15           |         |         | *42,100 | *42,100 | *32,270 | *32,270 | *27,180 | 23,650 | *24,160 | 18,160 | *20,430   | 15,710  | 32.5    |      |
| 10           |         |         | *50,260 | 45,720  | *36,240 | 30,790  | *29,290 | 22,750 | *25,190 | 17,700 | *22,280   | 15,010  | 33.1    |      |
| 5            |         |         | *48,010 | 41,400  | *39,080 | 29,430  | *30,970 | 21,950 | *26,010 | 17,260 | 22,280    | 14,790  | 33.1    |      |
| GROUND LEVEL |         |         | *47,900 | 42,870  | *40,080 | 28,660  | *31,720 | 21,400 | 25,860  | 16,950 | 22,720    | 15,030  | 32.5    |      |
| - 5          | *35,270 | *35,270 | *50,440 | 42,960  | *39,060 | 28,410  | *31,150 | 21,180 | *25,220 | 16,860 | *23,250   | 15,820  | 31.2    |      |
| - 10         | *55,490 | *55,490 | *45,320 | 43,470  | *35,950 | 28,590  | *28,660 | 21,310 |         |        | *23,230   | 17,810  | 28.5    |      |
| - 15         | *45,040 | *45,040 | *37,280 | *37,280 | *29,960 | 29,210  | *22,590 | 21,930 |         |        | *21,980   | 21,580  | 24.9    |      |

**950E with 35" Shoes, 23'2" Boom, 11'1" Arm**

**Conditions**

A: Load radius  
 B: Load point height  
 C: Lifting capacity rating  
 Cf: Rated loads over front  
 Cs: Rated loads over side

Boom length: 23'2"  
 Arm length: 11'1"  
 Bucket: None  
 Counterweight: 19,824 lbs  
 Shoes: 35" triple grouser  
 Unit: lbs



**A (Unit: ft)**

| B (ft)       | 10      |         | 15      |         | 20      |         | 25      |        | 30      |        | MAX REACH |         | A (ft)  |      |
|--------------|---------|---------|---------|---------|---------|---------|---------|--------|---------|--------|-----------|---------|---------|------|
|              | Cf      | Cs      | Cf      | Cs      | Cf      | Cs      | Cf      | Cs     | Cf      | Cs     | Cf        | Cs      |         |      |
| 25           |         |         |         |         |         |         |         |        |         |        |           | *19,420 | *19,420 | 28.5 |
| 20           |         |         |         |         |         |         | *25,280 | 24,910 | *23,390 | 18,870 | *20,670   | 17,590  | 30.8    |      |
| 15           |         |         | *42,100 | *42,100 | *32,270 | *32,270 | *27,180 | 24,090 | *24,160 | 18,510 | *20,430   | 16,020  | 32.5    |      |
| 10           |         |         | *50,260 | 46,580  | *36,240 | 31,370  | *29,290 | 23,190 | *25,190 | 18,050 | *22,280   | 15,320  | 33.1    |      |
| 5            |         |         | *48,010 | 41,400  | *39,080 | 30,000  | *30,970 | 22,390 | *26,010 | 17,610 | 22,700    | 15,100  | 33.1    |      |
| GROUND LEVEL |         |         | *47,900 | 43,760  | *40,080 | 29,230  | *31,720 | 21,840 | *26,210 | 17,300 | 23,170    | 15,340  | 32.5    |      |
| - 5          | *35,270 | *35,270 | *50,440 | 43,840  | *39,060 | 29,010  | *31,150 | 21,620 | *25,220 | 17,210 | *23,250   | 16,150  | 31.2    |      |
| - 10         | *55,490 | *55,490 | *45,320 | 44,330  | *35,950 | 29,180  | *28,660 | 21,750 |         |        | *23,230   | 18,180  | 28.5    |      |
| - 15         | *45,040 | *45,040 | *37,280 | *37,280 | *29,960 | 29,800  | *22,590 | 22,350 |         |        | *21,980   | *21,980 | 24.9    |      |

LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.



# STANDARD EQUIPMENT

## ENGINE SYSTEM

- Cummins diesel engine, turbocharger, inline 6-cylinder, 4 stroke, water cooled
- Air filter with pre-cleaner
- Pre-filter with water separator
- Auto-idle speed control
- Aspiration, turbocharged
- IPC (Intelligent Power Control) System
- Radiator, oil cooler, and intercooler; Hydraulic driven fan
- Engine overheat prevention system
- Engine oil filter

## DRIVETRAIN

- Hydraulic motor, one-piece two-gear piston and reducer
- 2-speed travel system with automatic shift

## SWING SYSTEM

- High-torque piston swing motor with integral spring set and automatic hydraulic release swing brake

## HYDRAULIC SYSTEM

- Main pump: two variable displacement piston pumps, ready for PTO
- Pilot pump: gear
- Cylinders: boom, arm, bucket
- Power boost function
- Swing with anti-reverse function
- Boom and arm regeneration circuits
- Pilot oil filter
- Pilot control shut-off lever
- 6-working mode selection system: Power, Economy, Fine, Lifting, Breaker, Attachment
- Load holding valve

## DIGGING EQUIPMENT

- 7,060 mm (23'2") boom
- 2,900 mm (9'6") arm
- 2.2 m<sup>3</sup> (2.88 yd<sup>3</sup>, SAE, heaped) bucket

## OPERATOR STATION

- Pressurized and sealed cab with all-around visibility, large roof window with slide sliding sun visor, front window wiper and removable lower window
- Mechanical suspension seat
- Air conditioner, heater, defroster
- AM/FM radio
- Glass-breaking hammer
- Cigarette lighter
- Cup holder
- Floor mat
- Storage box
- Fire extinguisher
- Rear view mirrors
- One key for all locks
- Roll-Over Protective System (ROPS)

## INSTRUMENTATION

- Color LCD monitor with alarms, filter/fluid change, fuel rate, water temperature, work mode, fault code, working hour, etc
- Fuel gauge
- Hydraulic oil level gauge

## ELECTRICAL

- Alternator 70 A
- Dual batteries 2 x 12 V
- Working lights, 1 frame mounted, 2 boom mounted
- Starting, 24 V

## UNDERCARRIAGE

- 600 mm track-shoes with triple grousers
- Rollers, bottom - 9 each side, top - 2 each side
- 2 piece under-guards (each side)
- Towing eye on base frame

## GUARDS

- Belly guards
- Cover plate under travel frame
- Track shields

## OTHER STANDARD EQUIPMENT

- Counterweight, 9,000 kg (19,824 lbs)
- Maintenance tool kit
- Maintenance parts package

# OPTIONAL EQUIPMENT

## ENGINE SYSTEM

- Electrical fuel refilling pump

## HYDRAULIC SYSTEM

- Control pattern change valve
- Hydraulic attachments rotation lines
- Overloading warning
- Cushion valve
- Dual way auxiliary lines
- Quick coupler lines (low and high pressure)

## UPPER STRUCTURE

- Upper frame protection (pipes)
- Belly guard and 8 mm thickness platform bottom plate
- Bucket cylinder guard
- Removable counterweight

## OPERATOR STATION

- Operation protection guard (included cab front and top guard, bar)
- Operation protection screen (on cab front, net)
- Operation protection screen (front-lower)
- Rain visor
- Air suspension seat

## UNDERCARRIAGE

- 700 mm (28"), 800 mm (32"), 900 mm (35"), track-shoes with triple grousers
- 3 piece track-guards (each side)

## DIGGING EQUIPMENT

- 7,060 mm (23'2") boom
- 2,900 mm (9'6") arm, 3,380 mm (11'1") arm
- 2.6, 3.2 m<sup>3</sup> (3.4, 4.2 yd<sup>3</sup>, SAE, heaped) bucket
- Hydraulic hammers
- Hydraulic quick couplers

## ELECTRICAL

- LED working lights on cab, 4 front and 2 rear
- Rear view camera
- Travel alarm
- Rotating beacon



**Guangxi LiuGong Machinery Co., Ltd.**  
No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China  
T: +86 772 388 6124 E: overseas@liugong.com  
www.liugong.com

Like and follow us:



**LG-PB-950E-Stage V-28-21052021-ENG**

The LiuGong series of logos herein, including but not limited to word marks, device marks, letter of alphabet marks and combination marks, as the registered trademarks of Guangxi LiuGong Group Co., Ltd. are used by Guangxi LiuGong Machinery Co., Ltd. with legal permission, and shall not be used without permission. Specifications and designs are subject to change without notice. Illustrations and pictures may include optional equipment and may not include all standard equipment. Equipment and options varies by regional availability.