



Working Height Max.
Horizontal Reach Max.
Overall Lift Capacity Max.

Overall Width And Length



23.8 m (78'1")
15.7 m (51'6")
300 / 454 kg
(661 / 1,000 lb)
2.42 x 9.5 m
(7'11" x 31'2")

LT22JE

Telescopic Boom Lift-Electric

TOUGH WORLD. TOUGH EQUIPMENT.

LT22JE SPECIFICATIONS >>>

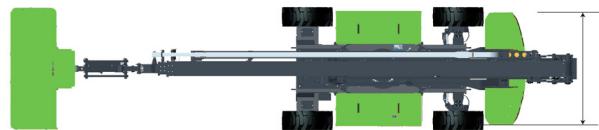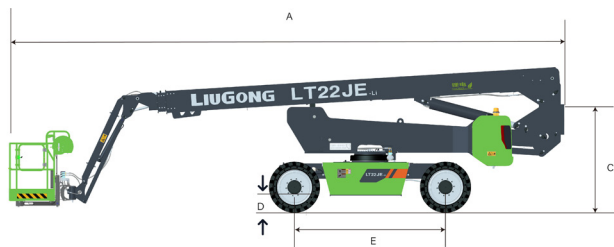

DIMENSIONS

Working Height Max.	23.8 m (78'1")
Platform Height Max.	21.8 m (71'6")
Operating Amplitude Max.	16.3 m (53'6")
Horizontal Reach Max.	15.7 m (51'6")
Platform Size (LxWxH)	2.4 x 0.9 x 1.1 m (7'10" x 2'11" x 3'7")
A. Length (Stowed/Transport)	9.5 m (31'2")
B. Width (Stowed/Transport)	2.42 / 2.28 m (7'11" / 7'6")
C. Height (Stowed/Transport)	2.47 / 2.27 m (8'1" / 7'5")
D. Ground Clearance	0.276 m (10")
E. Wheelbase	3 m (9'10")

PRODUCTIVITY

Overall Lift Capacity Max.	300 / 454 kg (661 / 1,000 lb)
Platform Occupancy Max.	2
Platform Rotation	± 90°
Vertical Jib Rotation (Up/Down)	- 65° ~ + 70°
Turntable Rotation	360° Continuous
Turntable Tailswing (Boom Raised/Stowed)	1.65 / 2.25 m (5'5" / 7'5")
Drive Speed (Stowed)	5 km/h (3.10 mph)
Drive Speed (Raised)	1 km/h (0.62 mph)
Gradeability	40 %
Tilt Sensor Activation	X 5° / Y 5°
Turning Radius (Inside/Outside)	4.2 / 6.3 m (13'9" / 20'8")
Tire Size (Solid Off-road)	33 x 12 - 20
Drive Steering Type	4WD x 2WS

WEIGHT

Overall Weight	11,070 kg (24,405 lb)
----------------	-----------------------

POWER

Battery (Lithium)	48 V / 460 Ah
Charger	48 V / 60 A
Lift Motor	AC 12 kW
Drive Motor	AC 3.3 kW
Auxiliary Power Unit	12 VDC
Hydraulic Tank Capacity	100 L (26 gal 3 pt)

LT22JE Working Range

